



P130 Access Platform mounted on a 3.5t Isuzu D-Max



WORKING DIAGRAM

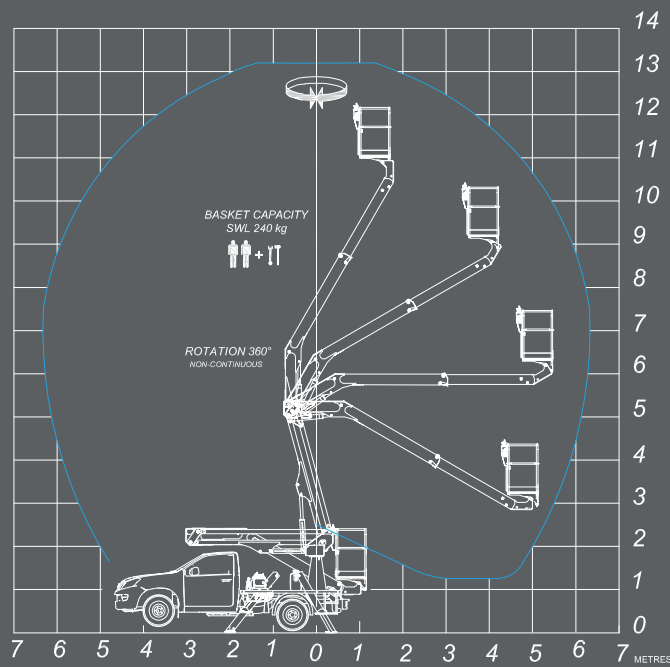

VEHICLE DRAWING

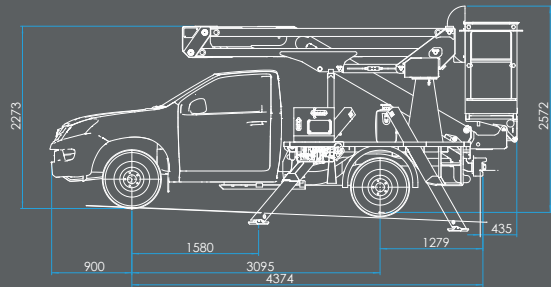

STANDARD SPECIFICATIONS

- 4 A frame stabilisers
- 2 person plastic basket
- Self levelling basket with manual trim
- Basket access from ground
- Knuckle remains within the confines of the vehicle envelope
- 5 degree stability
- 1 Kv Insulation protection
- 24 degree departure angle

OPTIONS

- Type approved towbar with 7tn GTW
- Fibreglass walk in basket
- Roof beacons
- Reversing camera
- Chapter 8 graphics
- Secure aluminium lockers
- Key out system
- Parking sensors

For more platform options, please contact us before ordering



13.1m



6.2m



360°
Non Continuous



240kg



1100 x 660 x 1360mm



Hour
counter



≤3.5 T



POSSIBLE TYPES OF VEHICLES

- Isuzu D-Max